




150x900MM



NRC-301




NRC-302

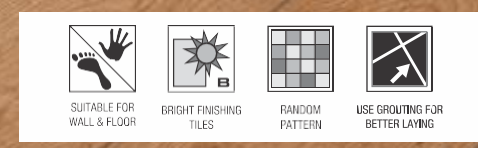

150x900MM | **WOODEN**
PLANK TILES



design
splendor







NRC-402



NRC-403



150x900MM | WOODEN PLANK TILES

-  SUITABLE FOR WALL & FLOOR
-  BRIGHT FINISHING TILES
-  RANDOM PATTERN
-  USE GROUTING FOR BETTER LAYING

design
excellence

NRC-102



NRC-101







NRC-303

150x900MM | **WOODEN**
PLANK TILES







NRC-304

-  SUITABLE FOR WALL & FLOOR
-  BRIGHT FINISHING TILES
-  RANDOM PATTERN
-  USE GROUTING FOR BETTER LAYING









NRC-401

- 
 SUITABLE FOR
WALL & FLOOR
- 
 BRIGHT FINISHING
TILES
- 
 RANDOM
PATTERN
- 
 USE GROUTING FOR
BETTER LAYING



NRC-309


- 
 SUITABLE FOR
WALL & FLOOR
- 
 BRIGHT FINISHING
TILES
- 
 RANDOM
PATTERN
- 
 USE GROUTING FOR
BETTER LAYING



NRC-305




NRC-307

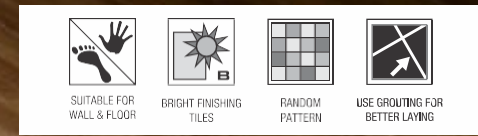

150x900MM | **WOODEN**
PLANK TILES



design
poise







NRC-308



NRC-306



**150x
900MM** | **WOODEN
PLANK TILES**

-  SUITABLE FOR WALL & FLOOR
-  BRIGHT FINISHING TILES
-  RANDOM PATTERN
-  USE GROUTING FOR BETTER LAYING

design
finesse

NRC-404





SPECIFICATIONS


Sr. No.	Pictogram	Property	International Std. ISO 13006/EN 176 Group	Tiles Value	Method of Testing
1		Deviation in length	+/-0.6%	+/-0.3%	ISO 10545 Pt 2
2		Deviation in thickness	+/-5%	+/-3%	ISO 10545 Pt 2
3		Straightness of sides	+/-0.5%	+/-0.1%	ISO 10545 Pt 2
4		Rectangularity	+/-0.6%	+/-0.2%	ISO 10545 Pt 2
5		**Surface flatness	+/-0.5%	+/-0.2%	ISO 10545 Pt 2
6		Water absorption	< 2-4%	< 2-4%	ISO 10545 Pt 3
7		*Mohs hardness	>6	>6	EN 101
8		Flexural strength	>35N/mm ²	³46N/mm ²	ISO 10545 Pt 4
9		Abrasion resistance	<175 mm ²	<144 mm ³	ISO 10545 Pt 6
10		**Skid resistance (Friction coefficient)	>0.4	>0.4	ISO 10545 Pt 17
11		Breaking strength	1113 N	2800 N	ISO 10545 Pt 4
12		Frost resistance	Frost proof	Frost proof	ISO 10545 Pt 12
13		Chemical resistance	No Damage	No Damage	ISO 10545 Pt 13
14		Thermal shock resistance	No Damage	No Damage	ISO 10545 Pt 9
15		Colour resistance	No Damage	No Damage	DIN 51094
16		Stain resistance	Resistance	Resistance	ISO 10545-14
17		Moisture expansion	Nil	Nil	ISO 10545-10
18		**Glossiness	-	Min.80% reflection	Glossmeter
19		Resistance to Surface Abrasion (of tiles intended for use on Floors)***	Abrasion class shall be specified by the manufacturer	PEI Group V	ISO-10545-7 IS:13630-11



PACKING DETAILS

Sr. No.	Size	No. of Tiles Per Box	Coverage Area in Sq. Feet	Approx. Weight / Box
1	150x900mm	8 Pcs.	11.62 Sq. Ft	23.2 Kgs

APPLICATIONS



DISCLAIMER: Wooden Tiles reserves the right to delete & amend either totally or partially, any of the colors, shapes, sizes, references and other technical specifications contained in this catalogue at anytime, the colors shown of tiles in this catalogue are purely illustrative and limited to printing process. Please refer actual sample before final selection. The details of sizes, colors, references should be verified for typographical errors.